







7. Dimensiones totales y de montaje (mm)




NC2-115~330



NC2-400~500



NC2-630~800





| Modelo | NC2-115 | | NC2-150 | | NC2-185 | | NC2-225 | |
|--------------|---------|-----|---------|-----|---------|-------|---------|-------|
| | 3P | 4P | 3P | 4P | 3P | 4P | 3P | 4P |
| A | 168 | 204 | 168 | 204 | 171 | 211 | 171 | 211 |
| B | 163 | 163 | 171 | 171 | 175 | 175 | 198 | 198 |
| C | 172 | 172 | 172 | 172 | 183 | 183 | 183 | 183 |
| P | 37 | 37 | 40 | 40 | 40 | 40 | 48 | 48 |
| S | 20 | 20 | 20 | 20 | 20 | 20 | 25 | 25 |
| Φ | M6 | M6 | M8 | M8 | M8 | M8 | M10 | M10 |
| f | 131 | 131 | 131 | 131 | 131 | 131 | 131 | 131 |
| M | 147 | 147 | 150 | 150 | 154 | 154 | 172 | 172 |
| H | 124 | 124 | 124 | 124 | 127 | 127 | 127 | 127 |
| L | 107 | 107 | 107 | 107 | 113.5 | 113.5 | 113.5 | 113.5 |
| X1 200~500V | 10 | | 10 | | 10 | | 10 | |
| X1 660~1000V | 15 | | 15 | | 15 | | 15 | |
| Ga | 80 | | 80 | | 80 | | 80 | |
| Ha | 110~120 | | 110~120 | | 110~120 | | 110~120 | |

Nota: a, f es la distancia mínima necesaria para montar y desmontar la bobina.


b. X1: la distancia de formación de arco se determina a través de la tensión de funcionamiento y de la capacidad de corte.

| NC2-265 | | NC2-330 | | NC2-400 | | NC2-500 | NC2-630 | | NC2-800 |
|---------|-----|---------|-----|---------|-----|---------|---------|-----|---------|
| 3P | 4P | 3P | 4P | 3P | 4P | 3P | 3P | 4P | 3P |
| 202 | 247 | 215 | 261 | 215 | 261 | 235 | 312 | 389 | 312 |
| 204 | 204 | 208 | 208 | 208 | 208 | 238 | 305 | 305 | 305 |
| 215 | 215 | 220 | 220 | 220 | 220 | 233 | 256 | 256 | 256 |
| 48 | 48 | 48 | 48 | 48 | 48 | 55 | 80 | 80 | 80 |
| 25 | 25 | 25 | 25 | 25 | 25 | 30 | 40 | 40 | 40 |
| M10 | M10 | M10 | M10 | M10 | M10 | M10 | M12 | M12 | M12 |
| 147 | 147 | 147 | 147 | 147 | 147 | 150 | 181 | 181 | 181 |
| 178 | 178 | 181 | 181 | 181 | 181 | 208 | 264 | 264 | 264 |
| 147 | 147 | 158 | 158 | 158 | 158 | 172 | 202 | 202 | 202 |
| 141 | 141 | 145 | 145 | 145 | 145 | 146 | 155 | 155 | 155 |
| 10 | | 10 | | 15 | | 15 | 20 | | 20 |
| 15 | | 15 | | 20 | | 20 | 30 | | 30 |
| 96 | | 96 | | 80 | | 80 | 180 | 240 | 180 |
| 110~120 | | 110~120 | | 170~180 | | 170~180 | 180~190 | | 180~190 |

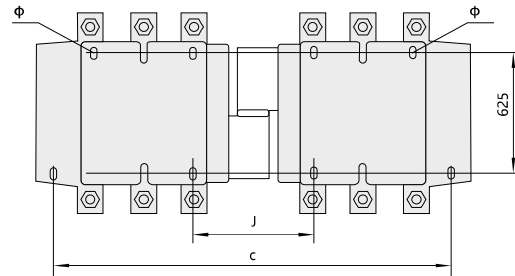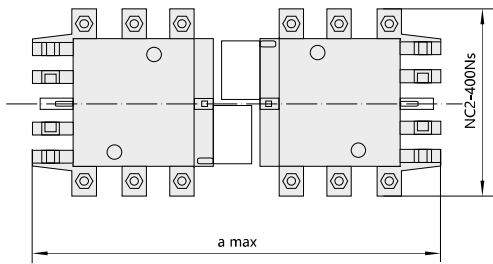


mm

| Modelo | polo | A max | b max | c | d | J |
|-----------|------|-------|-------|-----|---------|-----|
| NC2-115Ns | 3 | 350 | 157 | 330 | 110~120 | 71 |
| | 4 | 425 | 124 | 370 | | 108 |
| NC2-150Ns | 3 | 350 | 171 | 330 | | 71 |
| | 4 | 425 | 211 | 370 | | 111 |
| NC2-185Ns | 3 | 350 | 174 | 330 | | 78 |
| | 4 | 430 | 223 | 370 | | 118 |
| NC2-225Ns | 3 | 350 | 197 | 330 | | 78 |
| | 4 | 430 | 243 | 370 | | 118 |
| NC2-265Ns | 3 | 450 | 203 | 428 | | 109 |
| | 4 | 546 | 249 | 485 | | 157 |
| NC2-330Ns | 3 | 450 | 206 | 428 | | 124 |
| | 4 | 546 | 251 | 485 | | 172 |
| NC2-400Ns | 3 | 485 | 206 | 460 | 170~180 | 157 |
| | 4 | 595 | 251 | 485 | | 157 |
| NC2-500Ns | 3 | 485 | 238 | 460 | | 156 |
| NC2-630Ns | 3 | 650 | 304 | 625 | 180~190 | 139 |
| | 4 | 810 | 364 | 785 | | 139 |
| NC2-800Ns | 3 | 650 | 304 | 625 | | 139 |

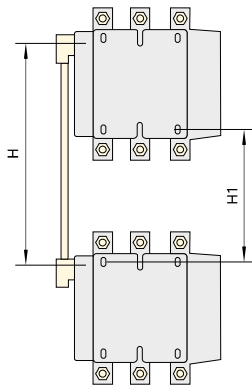

a. NC2-115Nc~225Nc

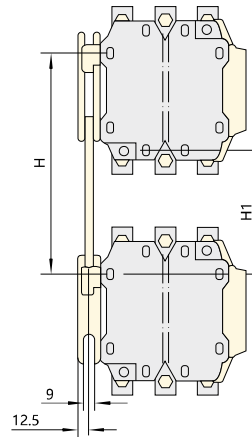



b. NC2-265Nc~800Nc

D

| Modelo | H | | H1 | |
|----------------------|------|------|------|------|
| | Mín. | Máx. | Mín. | Máx. |
| NC2-115Nc, NC2-150Nc | 200 | 310 | 80 | 190 |
| NC2-185Nc, NC2-225Nc | 220 | 310 | 100 | 190 |
| NC2-265Nc | 250 | 380 | 130 | 260 |
| NC2-330Nc | 260 | 380 | 60 | 200 |
| NC2-400Nc | 280 | 380 | 100 | 200 |
| NC2-500Nc | 300 | 380 | 120 | 200 |
| NC2-630Nc | 380 | 380 | 200 | 200 |
| NC2-800Nc | 380 | 380 | 200 | 785 |

8. Montaje con relé de sobrecarga

8.1 Montaje con relé térmico de sobrecarga

| Modelo de contactor | Relé térmico de sobrecarga montado | | | |
|---|--|-----------------------|-----------------------------|-----|
| | Modelo | Corriente nominal (A) | Tipo de fusible recomendado | |
| | | | aM | gG |
| NC2-115 NC2-150 NC2-180 NC2-225 |  NR2-200 | 80~125 | 125 | 200 |
| | | 100~160 | 160 | 250 |
| | | 125~200 | 200 | 315 |
| NC2-185 NC2-225 NC2-265 NC2-330 NC2-400 NC2-500 NC2-630~800 |  NR2-630 | 160~250 | 250 | 400 |
| | | 200~315 | 315 | 500 |
| | | 250~400 | 400 | 630 |
| | | 315~500 | 500 | 800 |
| | | 400~630 | 630 | 800 |