



5. Accessories

Items		Model	NC2-115	NC2-150	NC2-185	NC2-225
AC coil	Coil power	In-rush (VA)	660		966	
		Sealed (VA)	85.5		91.2	
	Operation range	Operation voltage	(85%~110%) Us			
		Drop-out voltage	Common products; 20%~75%; electricity-saving products: 10%~75%Us			
	Coil code	3P	FF XXX		FG XXX	
	(XXX=coil voltage)	4P	FF XXX/4		FG XXX/4	
Coil voltage (50Hz,60Hz,50/60Hz)(V AC)		110,127,220,230,380,400				

F4 auxiliary contact



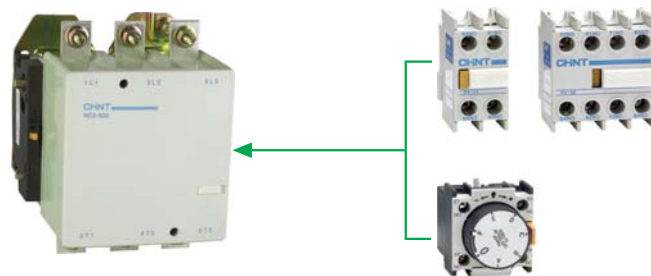

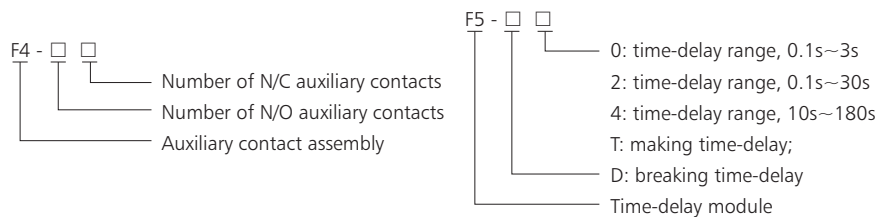
F5 auxiliary contact



NC2-265	NC2-330	NC2-400	NC2-500	NC2-630	NC2-800
840	1,500	1,500	1,500	1,700	1,700
150	34.2	34.2	34.2	34.2	34.2
(85%~110%) Us					
Common products; 20%~75%; electricity-saving products: 10%~75%Us					
FH XXX	FI XXX	FJ XXX	FK XXX	FL XXX	FM XXX
FH XXX/4	FI XXX	FJ XXX	-	FL XXX/4	-

110,127,220,230,380,400

Picture	Model	Configuration of contacts	
		Number of NO contact	Number of NC contact
	F4-20	2	0
	F4-11	1	1
	F4-02	0	2
	F4-40	4	0
	F4-31	3	1
	F4-22	2	2
	F4-13	1	3
	F4-04	0	4
Picture	Model	Time-delay range	Configuration of time-delay contacts
	F5-T0	0.1s~3s	N/O+N/C
	F5-T2	0.1s~30s	N/O+N/C
	F5-T4	10s~180s	N/O+N/C
	F5-D0	0.1s~3s	N/O+N/C
	F5-D2	0.1s~30s	N/O+N/C
	F5-D4	10s~180s	N/O+N/C

D