



ICAR S.P.A. - INDUSTRIA CONDENSATORI  
Via Isonzo, 10 - 20052 MONZA (MI) - ITALY  
Telefono +39 039 83951 - Fax +39 039 833227  
www.icar.com - icar@icar.com

T.S. N°: 2K7740 REV.A  
Date: 25.10.2018  
Signature MC  
Approval: DT DQ  
Sheet 1 of 2

## TECHNICAL SPECIFICATION

### THREE PHASE POWER-FACTOR CORRECTION CAPACITORS

Self-healing metallized dielectric capacitor, metallic casing,  
resin filled, dry. Overpressure disconnecter.

# CRT-E-116208-15-230

#### RATINGS, GENERAL CHARACTERIST.

----- :  
-----  
Rated Capacitance Cn 3 x 250 $\mu$ F (Delta connection)  
Capacitance tolerance +10-5 %  
Rated A.C. Voltage Urms 230 V  
Rated frequency f 60 Hz  
Rated Power Qn 15,0 kvar  
Max operating AC voltage Umax 250 V  
Peak voltage Us (not repetitive) 650 V  
Rated r.m.s. current In 37,6 A  
Max operating current Imax 48,9 A  
Maximum peak current i 3.800 A  
Temperat.coeff.of capacitance - 260 ppm / °C

#### TEST DATA

----- :  
-----  
AC Test between terminals, 10s 490 V  
AC Test between terminals and case, 10s 3.000 V

#### ENVIROMENTAL CHARACTERISTICS

----- :  
-----  
Climatic Category: T min = - 25 °C T max = + 55 °C  
Storage temperature: Ts min = - 40 °C Ts max = + 85 °C


#### RELIABILITY at MAX HOT SPOT

----- :  
-----  
max expected number failures -  
per 10exp9 components hours 500 fit  
Expected life (Ln) 100.000 h at 55°C hot spot

#### MECHANICAL CHARACTERISTICS

----- :  
-----  
Case dimensions: D 116.0 H 208.0 mm  
Fixing: Stud M12 x 16 mm  
Maximum torque (fixing): 10 Nm  
Case material: Aluminium, black painted  
Terminals: Terminals board connection  
Maximum torque: 3 Nm  
Approx weight: 2.600 g  
Creepage distance: 19 mm  
Clearance: 19 mm  
Reference: IEC EN 60831 - 1 IEC EN 60831 - 2  
UL approved - file number E99479

## TECHNICAL SPECIFICATION

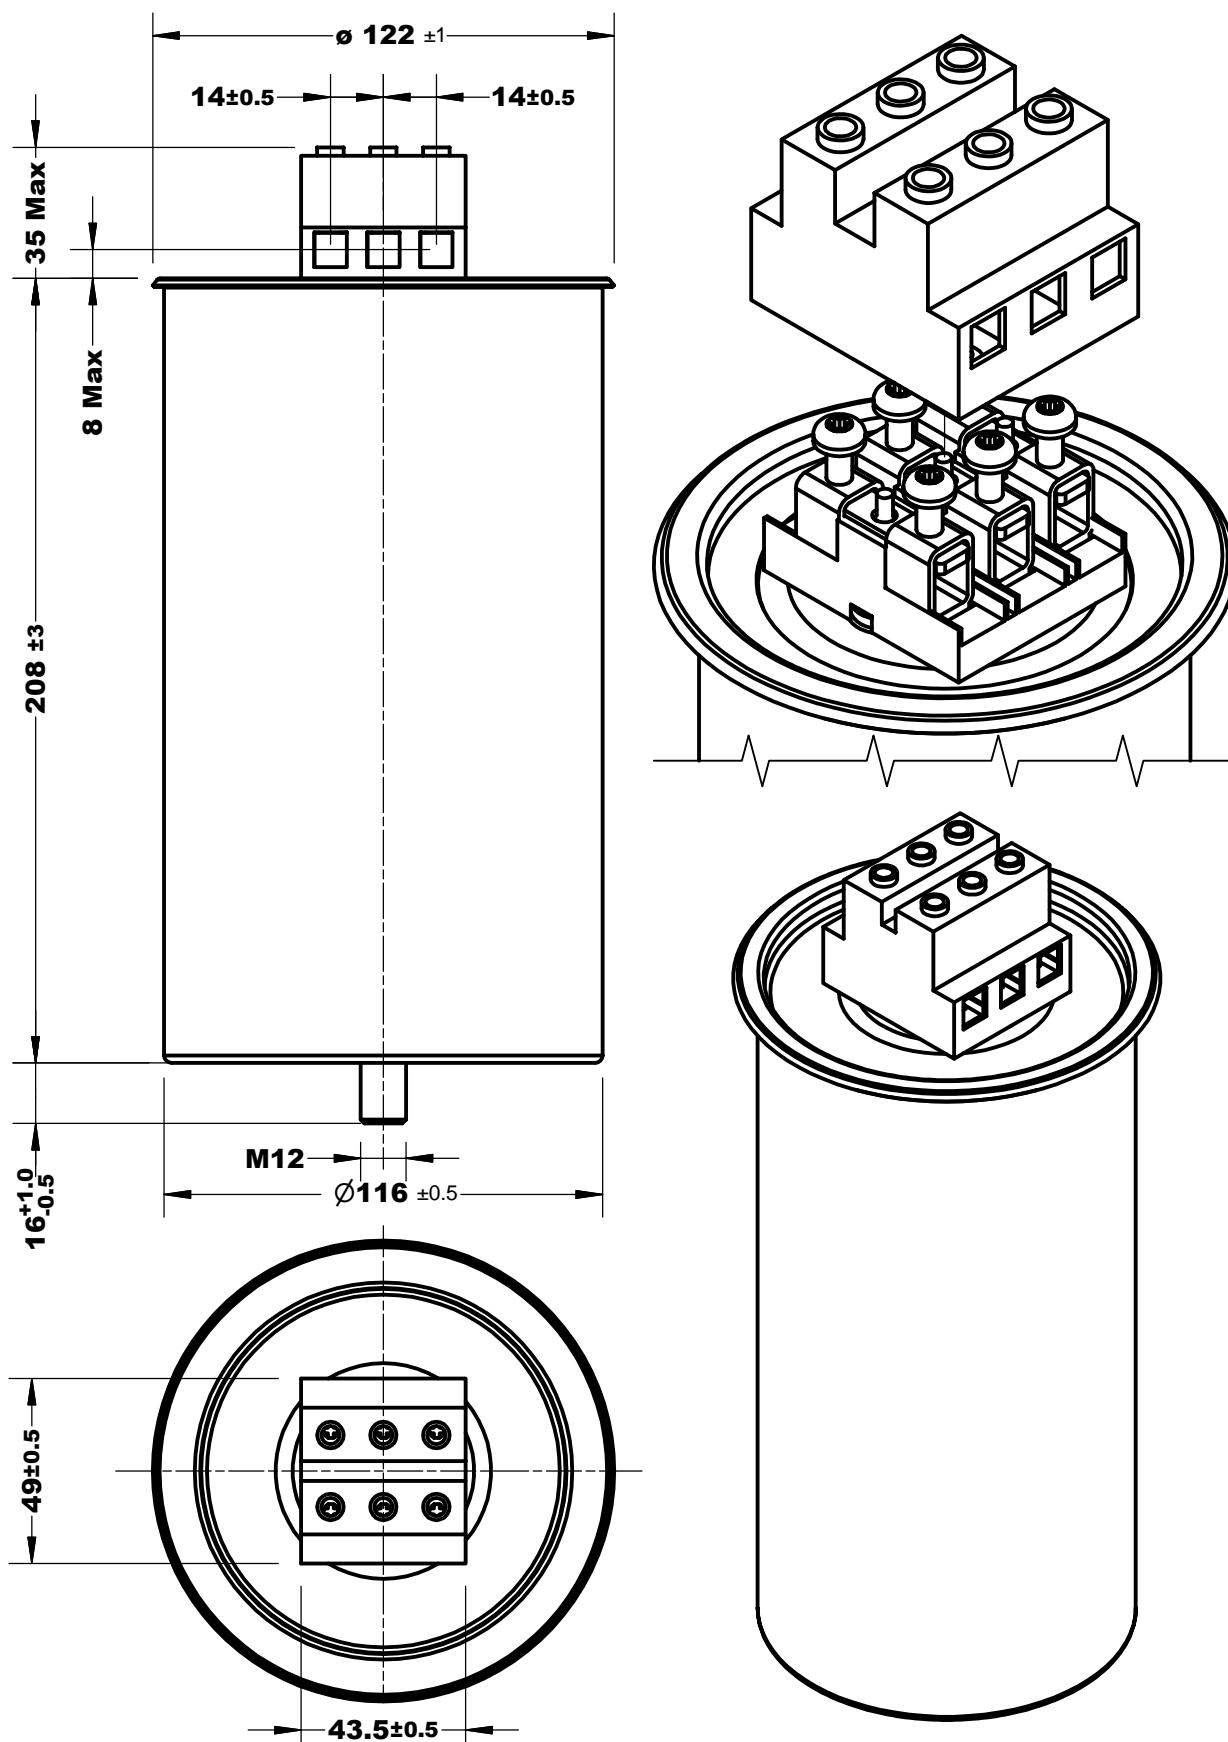

**CRT - E - 116208 - 15 - 230**