

Technical_data_MDC1A-040-1000


Version: 01.01.2021

Page 1/1

Technical data MDC1A-040-1000

acc. IEC 60947-1, IEC 60947-3, CCC			
Rated insulation Voltage		Vdc	1000
Conventional thermal current I_{th}	open	Adc	40
Rated impulse withstand voltage U_{imp}		kV	8
Rating			
Rated operational voltage U_e	DC-21B	Vdc	-
Rated operational current I_e		Adc	-
Rated operational voltage U_e	DC-21B	Vdc	1000
Rated operational current I_e		Adc	40
Rated operational voltage U_e	DC-PV1	Vdc	400
Rated operational current I_e		Adc	40
Rated operational voltage U_e	DC-PV1	Vdc	600
Rated operational current I_e		Adc	40
Rated operational voltage U_e	DC-PV1	Vdc	800
Rated operational current I_e		Adc	40
Rated operational voltage U_e	DC-PV1	Vdc	
Rated operational current I_e		Adc	
Rated short time withstand current $I_{cw, 1sec}$		Adc	540
Rated short time making capacity I_{cm}		Adc	540
Pollution degree			3
Overvoltage category			III
Terminal cross section solid or multi-stranded	min./max.	mm ²	1,5 - 10
Finely stranded with ferrule	min./max.	mm ²	1,5 - 10
Terminal screws			M4
Torque terminal screws		Nm	2
Ambient temperature		C°	+70/-40
Ambient temperature peaks up to		C°	+75

Available for 1, 2 and 3MPPT

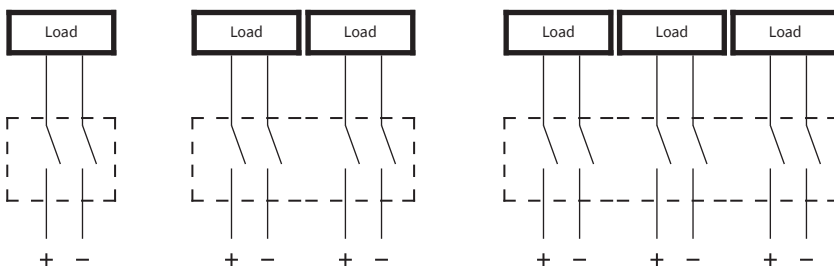

Subject to change without notice, errors and errata excepted.